TRAFFIC CONTROL PLAN
SHEET TITLE

TRAFFIC CONTROL GENERAL NOTES
STANDARD TRAFFIC CONTROL REQUIREMENTS

1.It is the responsibility of the Contractor performing work on a public street to install and maintain the traffic devices during the construction.

2.All signs, delineators, barricades, etc. and their installation shall conform to the California Manual on Uniform Traffic Control Devices (CA MUTCD latest edition) and /or the latest edition of the City of Long Beach Standard Traffic Control Plans.

3.All delineators shall be equipped with reflective band at nighttime.

4.In the interest of safety, the City Public Works Department reserves the right to observe these traffic controls plans in use and to make any necessary changes as field conditions warrant. Any changes shall supersede the traffic control plans.

5.All traffic control devices, stripes, markings, legends and raised pavement markers shall conform to CAMUTCD latest edition and Long Beach Standard plans (most recent edition).

6.The contractor must maintain a minimum of one travel lane in each direction. All turning movements shall be maintained whenever possible as well. When the number of lanes is reduced to less than a single lane in each direction, the contractor shall be required to assign a flagger to direct traffic always during construction activities.

7.To provide accurate messaging to all whom traverse the work zone, all traffic control devices shall be maintained in their proper position at all times, and shall be repaired, replaced, or cleaned as necessary to preserve their appearance and continuity.

8.All temporary traffic control devices shall be removed following completion of each construction stage and the contractor, upon completion of the construction activities, shall restore the roadway and all its elements to the prior condition.

9.The Contractor shall be responsible to cover, or remove all conflicting signs that may be impacted by the construction activities or traffic control set-up.

10.The Contractor shall be responsible to return all roadways to full traffic operations by plating or backfilling the excavation, when construction is not being performed.

11.Egress and ingress of abutting driveways and minor street intersections shall be maintained always during construction activities.

12.Parking may be prohibited, as needed, by posting approved temporary "No Parking" signs defining the time and date of any such restriction at least 48 hours prior to the start of construction. Sign spacing shall be 40 feet maximum and 4 feet above ground. "No Parking" signs are available for purchase from the 2nd floor Permit Center at the time of picking up the permit. Any time after the permit is issued the permit must be shown along with the approved set of plans to the City for purchase of the "No Parking" signs.

13.The Contractor shall be responsible to notify 72 hours prior to the start of construction, to all businesses and residents impacted by construction activities.

14.The Contractor shall be responsible to conduct construction activities in such a manner to minimize inconvenience to property owners within the vicinity of the construction work, or any other entities that may be impacted by construction activities in the immediate vicinity.

15.All traffic pavement markings, reflective pavement markers, and traffic signs shall be replaced prior to opening any lane to traffic. If temporary markings are used, they must be properly maintained and inspected daily (Monday through Friday) by the contractor until the permanent markings are installed. All temporary markings shall be reflectorized.

16.The Contractor shall be responsible to replace existing vehicle loop detectors obliterated by the construction in a prompt manner. Loop detector replacement shall be accomplished per City of Long Beach Standards and must be coordinated with City Traffic Operations. For temporary detection and/or temporary traffic signal timing, plans may be required for construction activities. Any deviations from this requirement must be approved by The City Traffic Engineer.

17.Any work affecting public bus stops must be coordinated with Long Beach Transit. Contact Rodney Lampkin at (562) 843-7594 at least 48 hours prior to work.

18.If construction area is within a school zone, the contractor shall notify Steve Bui, Transportation Director of LBUSD at (562) 426-6176, 48 hours prior to start of work.

19.If construction area is within a pedestrian school crossing, the contractor shall notify Taine Reed, Crossing Guard Supervisor of Public Works at (562) 570-7240, 48 hours prior to start of work.

20.Alleys may be closed to through traffic during working hours, but the Contractor shall be required to maintain local access always.

21.The Contractor shall be responsible to maintain existing pedestrian access or establish detour route. If a pedestrian walkway cannot be provided, sidewalk closure shall be per the City's Pedestrian Access During Construction Projects Standards. All pedestrian paths of travel around work zones shall be accessible and compliant with Federal, California and local laws, including ADA accessibility. Temporary signs may not be placed in a manner that encroaches on open ADA paths of travel.

22.The Contractor shall be responsible to maintain normal access to all bicycle facilities whenever possible. If normal access is not achievable, the Contractor shall be required to provide an alternate route for bicyclists and close the bicycle facility per latest CA MUTCD or City of Long Beach Standard Traffic Control Plans.

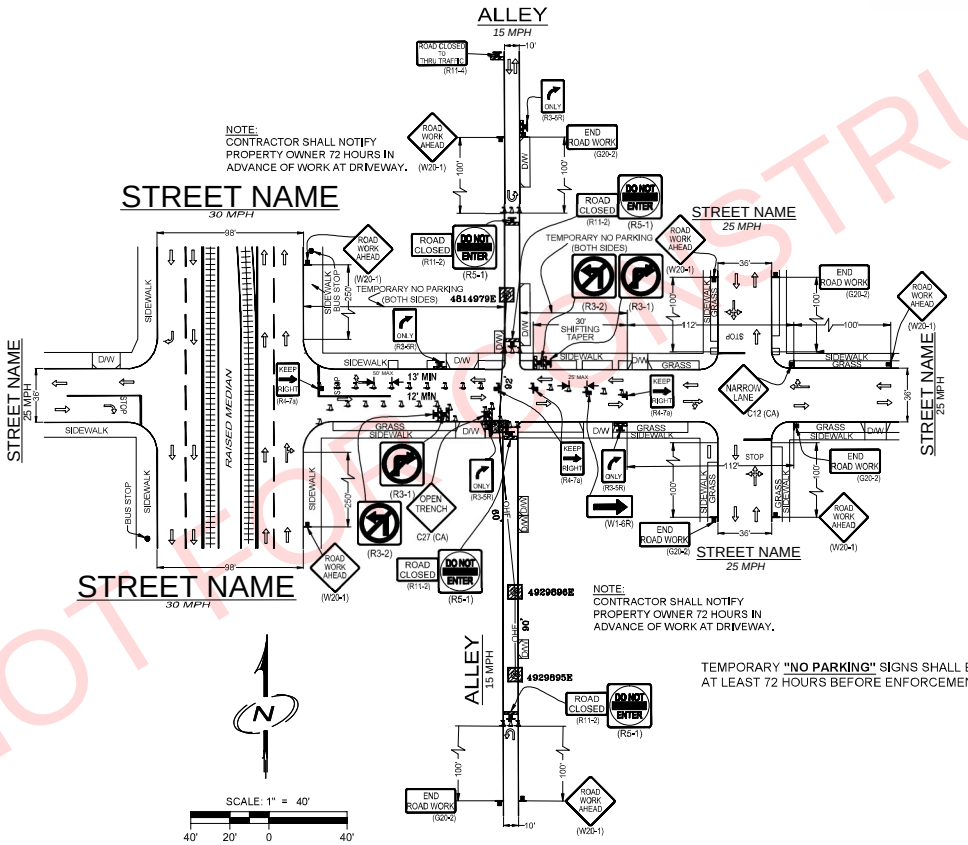

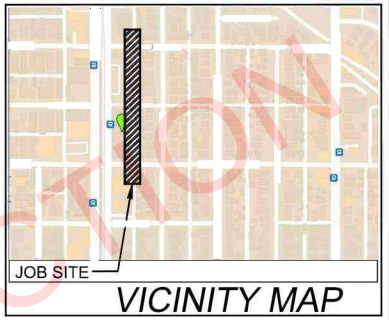



NOTE:
CONSTRUCTION HOURS:
8:30 A.M. - 3:30 P.M.

NOTE:
WORK DURATION:
2 DAYS

REGISTERED PROFESSIONAL ENGINEER
ENGINEER'S SEAL
STATE OF CALIFORNIA

ENGINEER'S SIGNATURE

DATE

DESIGNED BY.....

PLAN REVISIONS:

REV #	DATE	DESCRIPTION	INT

DIGALERT
CALL TOLL FREE
48 HOURS BEFORE YOU DIG
UNDERGROUND SERVICE ALERT
PHONE NO. 811

TEMPORARY TRAFFIC CONTROL PLAN

APPLICANT:

AGENCY/CITY:
CITY OF LONG BEACH

PERMIT TRACKING NUMBER:

LOCATION:

SYSTEM MAP #:

FILENAME:	DATE:	DRAFTED:	DATE:	ADDED BY:	DATE:	SHEET 1 OF 2
-						

SAMPLE NOT FOR CONSTRUCTION