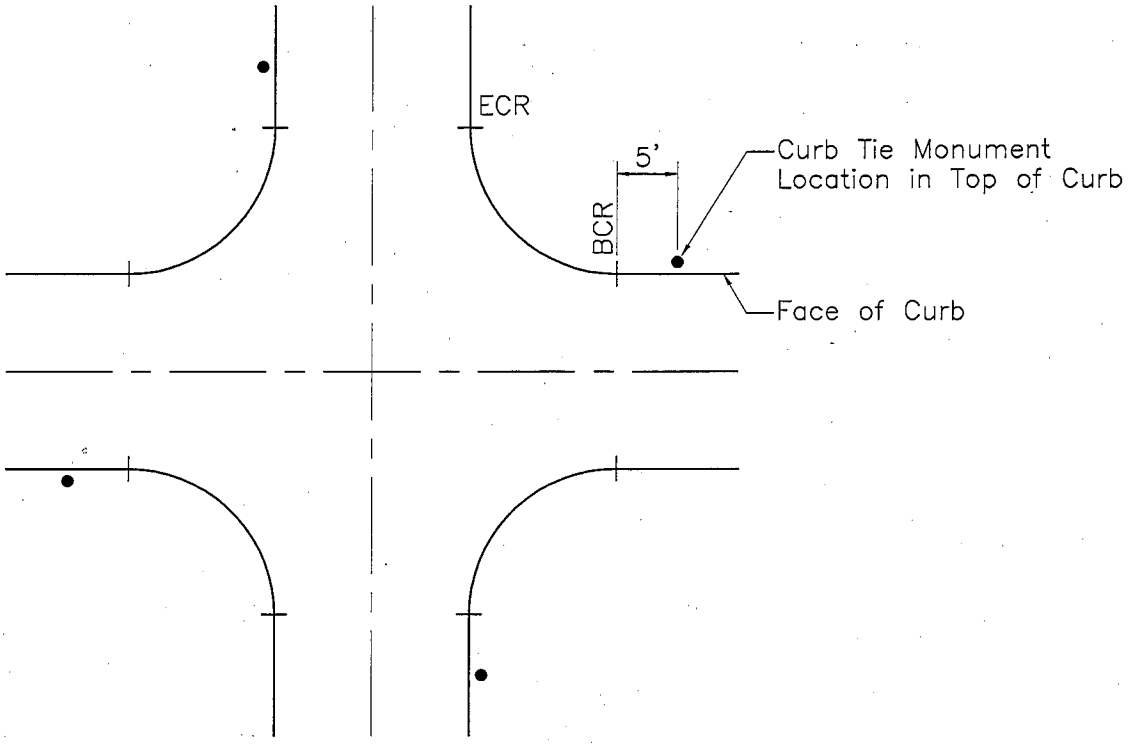

CURB TIE MONUMENT LOCATIONS AT TYPICAL STREET INTERSECTION

NOTES:

1. Brass Curb Tie Monuments, approximately. 1 1/2" dia. with 2" embedment stud, will be provided by the City.
2. Contractor shall install Curb Tie Monuments in newly constructed curbs at curb returns.

REVISIONS		CITY OF LONG BEACH, CALIFORNIA DEPARTMENT OF PUBLIC WORKS	STANDARD PLAN NO.
NO.	DATE		
1		CORNER CURB TIE INSTALLATION	205
2			
3		APPROVED BY: Mal A Atteff DATE: 1/15/08	SHEET
4		CITY ENGINEER R.E. No. 40599 EX. DATE 03/31/09	1 OF 1